

Save Time and Money with the Right Materials and Methods

Plasma spray coatings are a form of thermal spray used for precision coating of parts and components. Extremely high temperatures (exceeding 15,000° F in the jet) allow the plasma spray to melt materials that have extremely high melting temperatures. Plasma spray is the only method used to produce pure ceramic coatings from ceramic powder.

Common applications for plasma spray include thermal barrier coatings, abradable coatings, corrosion resistant coatings, and wear coatings. Plasma spray coatings are often applied to gas turbine components, both in production and repair.

The Need for Masking

In many cases items receiving plasma spray coatings have specific non-target areas that must be protected from the coating spray. These areas must be masked with a durable masking material that will stand up to the abrasion and heat of both the surface preparation (grit blasting) and thermal spray processes.

Advantages of Engineered Masking Solutions from PTFE Group

Engineered to meet the demands of a wide range of thermal spray coating processes including plasma spray, PTFE Group Masking Materials offer superior performance. All PTFE Group Thermal Spray Masking Materials are engineered for:

- **Heat Resistance** – From the substrate to the coatings and adhesives, PTFE Group masking materials are engineered to resist the extreme temperatures of thermal spray coating processes including plasma spray.
- **Abrasion Resistance** – The types of coatings and thicknesses used are engineered to resist the abrasive forces of both the grit blast and plasma spray coating processes. PTFE Group products can be applied once for both grit blasting and plasma spray coatings.
- **Conformability** – Our tapes and compounds are easy to work with and conform well to surface contours in more complex masking applications.
- **Adhesion** – masking tapes exhibit high adhesion to metal and to themselves (to prevent flagging).
- **Clean Release** – Despite high adhesion, the tapes are designed to remove cleanly with no adhesive residue.

Opportunities for time and cost savings


The costs associated with masking for plasma spray coating include the time and materials involved in the masking process, as well as possible added time for clean-up afterwards if inferior products or methods are used.

For example, clean-up or repair may be required if the masking material has failed during the spray-coating process, or if residue has been left by an inferior masking material with a low-grade adhesive.

Further costs arise if parts must be masked twice, once for grit blasting (surface preparation) and again prior to receiving the spray coating. Use of high-quality PTFE Group Thermal Spray Masking Materials can eliminate all of these added costs.




Grit blasting prepares the surface to receive the HVOF spray coating. Masking also protects the part from the grit blast particles.




Pre-Masking



Masking Detail



Post-Spray

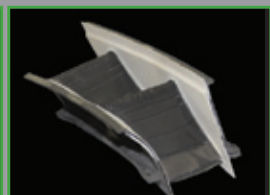

Post-Spray (masking removed)



Post-Spray Tape (front and back)

Opportunities for Time and Cost Savings

To improve masking efficiency, we recommend the following masking strategies

- **Eliminate Unnecessary Masking Layers** – When using weaker masking tapes, more layers (three or four) are generally used to ensure the tape provides a suitable barrier to protect the part being sprayed. Stronger PTFE Group silicone glass tapes (plasma spray masking tapes) can be applied with just one or two layers. This allows for faster masking and less tape consumption. The GBI 170 series tapes can reduce labor and processing times while reducing tape consumption considerably.
- **Use Die Cuts to Save Time and Improve Safety** – For repetitive masking jobs, PTFE offers both Pre-Cut lengths and widths and Die-Cut to allow for faster masking and better accuracy. Less cutting during tape application results in reduced risk of injury such as cuts and repetitive strain injury.
- **Reduce or Eliminate Clean-Up Time** – Unlike other tapes, GBI thermal spray masking tapes leave no adhesive residue which eliminates the need for additional clean up efforts, again producing a time and cost savings.
- **Eliminate Repetitive Masking** – PTFE Group masking products are suited to endure both grit blast and flame spray coatings with one application. Therefore, no additional masking is needed (mask only once). The result is a more efficient masking solution, that saves valuable time, money and increases the efficiency of your operation.

Product Recommendations for Plasma Spray Masking

Tapes


- **GBI 170-10s YL** – A reliable masking tape for most standard plasma spray applications.
- **GBI 170-10s Green** – For applications that involve higher abrasion. This tape produces cleaner coating lines and may be used with fewer layers (and less quantity) than standard tapes.
- **GBI 170-10s Red** – Recommended for applications involving higher temperatures. This tape resists burning / scorching which leaves cleaner coating lines and less residue from any scorching that may occur.
- **GBI 170-14C** – A premium masking solution for applications involving the harshest conditions including high abrasion and high temperatures. This tape can be applied in fewer layers (less quantity) which results in faster masking, less waste and overall savings in terms of time and cost.

Compounds


- **All Purpose and High Velocity Masking Compounds (APMC & HVMC)** – Ideal for creating reusable masking moulds, plugs, caps, & sleeves.

Fabrics

- For secondary masking, **GBI S/W 35** thermal spray masking blanket (silicone coated glass fabric) can be deployed to protect against overspray. This material is reusable for many cycles.

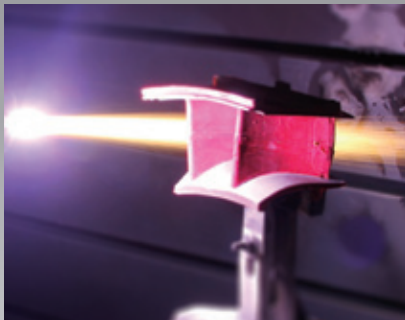

170-10s Red Plasma Spray Masking Tape

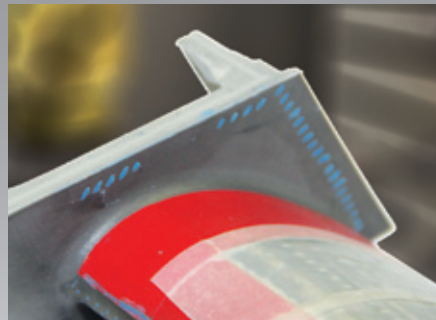

HVMC - High Velocity Masking Compound (blue) and 170-10s Red Plasma Spray Masking Tape



170-10s Thermal Spray Masking Tape and S/W 35 Silicone Coated Fiberglass Fabric.

PTFE GROUP OF COMPANIES

Canada

green belting industries

381 Ambassador Drive
Mississauga, ON L5T 2J3
Canada

T: 905-564-6712
F: 905-564-6709
E: custserv@greenbelting.com

www.greenbelting.com

Italy

mapelli

20060 Pozzo d'Adda (Mi)
Via Meucci, 7
Italy

T: +39.02.90967258
F: +39.02.90967236
E: info@mapelli-ptfe.com

www.mapelli-ptfe.com

UK

biscor

Unit 8, Kingsmark Freeway
Bradford BD12 7HW
United Kingdom

T: +44(0) 1274 694684
F: +44(0) 1274 694685
E: info@biscor.com

www.biscor.com

USA

greenbelt industries

45 Comet Street
Buffalo, New York 14216
USA

T: 800-668-1114
F: 905-564-6709
E: custserv@greenbelting.com

www.greenbelting.com